


Louvre Door Series

Chevron Blade

Technical Datasheet

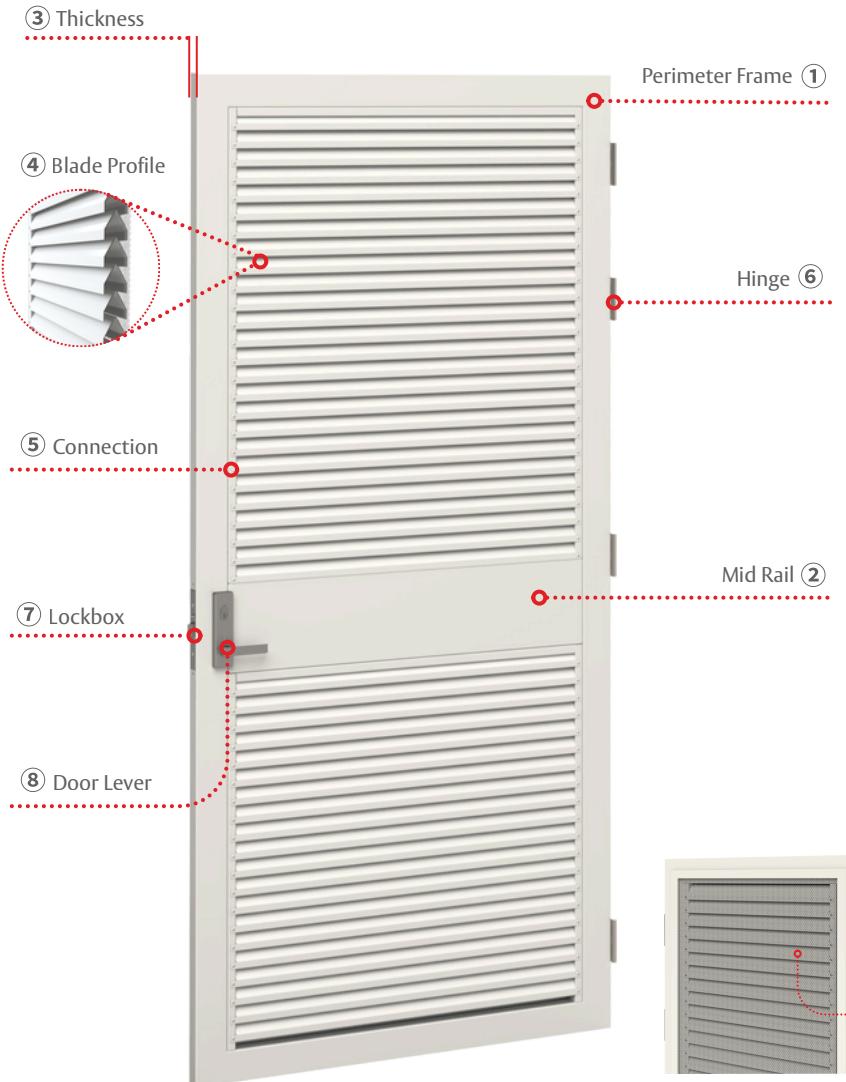

The **Chevron Louvre Door** features **chevron louvre blades**, offers reversible handing, operates inward or outward, and is available in a full range of sizes in single or double-leaf configurations.

It can be pre-hung and installed in a 1.6 mm pressed metal frame with a 3-sided or 4-sided design.

The door is compatible with most locking devices and hardware. Optional accessories include a range of **mesh options** that allow airflow while maintaining safety and durability.

Built for **moderate airflow and enhanced security**, this door remains non-transparent from both inside and outside, while providing a strong barrier to protect assets and property.

Perimeter Frame Details:

- ① 38x76x1.6mm RHS Galvanised

Door Leaf Details:

- ② Mid Rail: suits any types of hardware
- ③ Door Thickness:
 - 40mm - Standard
 - 50mm - Optional

Blade Details:

- ④ Blade Cross-Section Profile
 - Type: Chevron louvre blade
 - Material: Galvabond Steel
 - Thickness: 1.2mm

Components Connection:

- ⑤ Blades secured with **heavy duty rivets** to the front and rear

Hardware Details:

- ⑥ Hinges
- ⑦ Lockbox: 200-300mm 1.6mm Galvabond
 - Includes preparation for most commercial locking mechanisms
- ⑧ Door Lever

Mesh Details & Options:

- ⑨ Mesh Options:
 - Bird Mesh
 - Vermin Mesh
 - Insect Mesh
 - Security Screens


Finish Options:

- Supplied in standard **Colorbond** colour with factory-applied durable polyester **Powdercoat**, optional colours available.
- Also offered in 304 or 316 Grade **Stainless Steel**.
- Other options available upon request.

Lietzke Australia PTY. LTD.

Adelaide Branch: 25 Circuit Court, Hendon SA 5014
Brisbane Branch: 181-185 Cobalt St, Carole Park, QLD 4300
Email: sasales@lietzkesecurity.com.au
qldsales@lietzkesecurity.com.au
Phone: (08) 8445 9999 Fax: (08) 8347 2073

DO NOT SCALE DRAWING.
DIMENSIONS IN MILLIMETERS.



GENERAL TOLERANCES:

Unless Otherwise Stated:
0 Dec. place ± 0.5 mm
1 Dec. place ± 0.25 mm
2 Dec. place ± 0.10 mm
Holes: $+0.25$ mm - 0 mm
Angles: $\pm 0.25^\circ$

Scan for more information

