


Defender® Series Door with 4point locking

Lietzke

ASSA ABLOY

Technical Datasheet

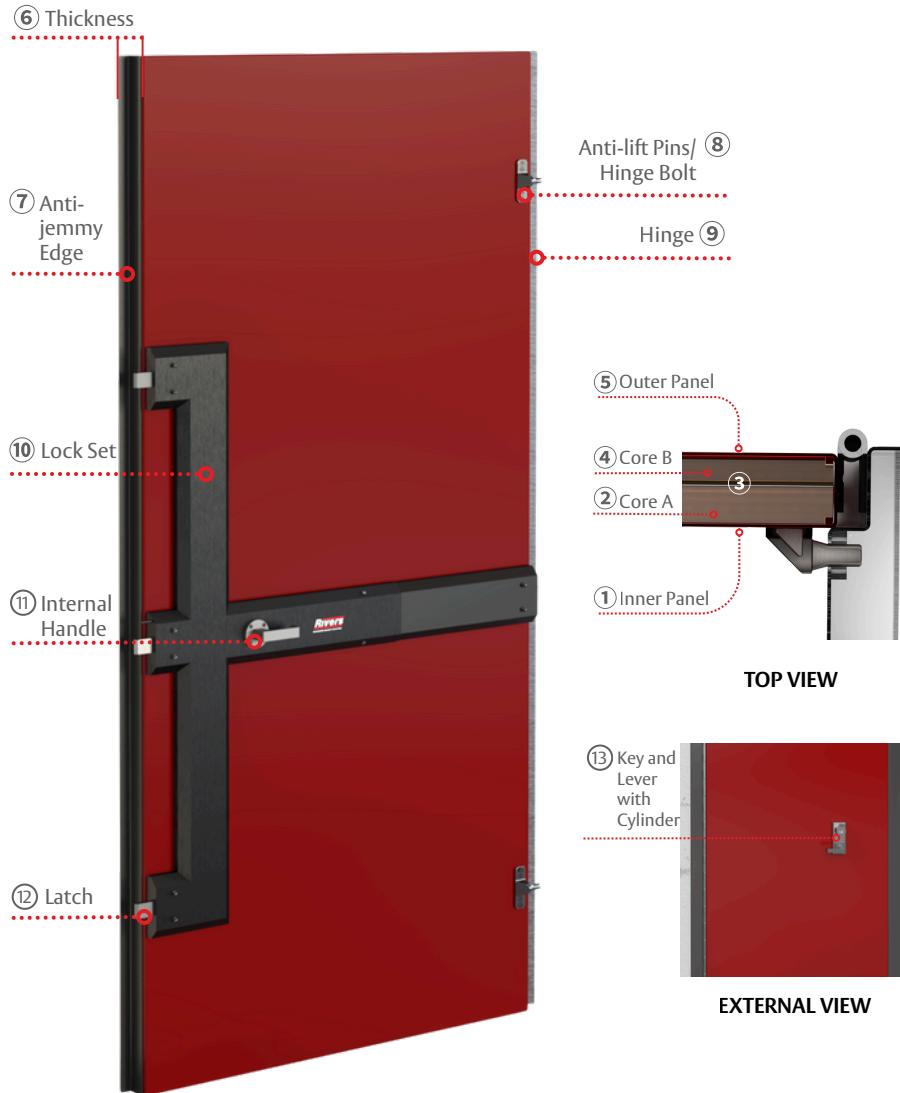

Enclosed Door Leaf Details:

- ① Inner Panel: 2mm Galvanised Steel Sheet
- ② Internal Core A: 25mm Hoop Pine Plywood
- ③ Optional Intermediate Panel: 3mm K700 Steel Plate
- ④ Internal Core B: 16mm Hoop Pine Plywood
- ⑤ Outer Panel: 2mm Galvanised Steel Sheet
- ⑥ Door Thickness: 45mm - 60mm (Customisable)

Door Furniture Details:

- ⑦ Anti-jemmy Edge - Optional
- ⑧ Anti-lift Pins / Hinge Bolts
- ⑨ 4mm Continuous Hinge

- ⑩ Specified Lockset:
Rivers Security Model F Four-point Lock
*Rivers Security Two-point Lock available

Optional Configurations:

- ⑪ Internal Handle
- ⑫ Door Latch
- ⑬ External Key and Lever with Cylinder

Finish Options:

- Supplied in grey zinc rich primer, ready for final paint


Defender® Series Door with 4point locking is constructed with layered galvanized steel and equipped with high-security hardware. It operates inward or outward and is available in a full range of sizes in single or double-leaf configurations.

It can be installed in a 3 mm thick Zincanneal heavy-duty split frame design for full wall encapsulation.

The door is specified with a **Rivers Security Model F Four-point Locking System**. Optional accessories include anti-jemmy edge, bullet-resistant vision panels, air relief grilles, eye viewers, door seals, and security hatches.

Engineered for **maximum protection and durability**, the door is ideal for both building perimeter and internal applications where the security of assets and property is critical.

Lietzke Australia PTY. LTD. Adelaide Office: 25 Circuit Court, Hendon SA 5014 Brisbane Office: 181-185 Cobalt St, Carole Park, QLD 4300 Email: sasales@lietzkesecurity.com.au qldsales@lietzkesecurity.com.au Phone: (08) 8445 9999 Fax: (08) 8347 2073
DO NOT SCALE DRAWING. DIMENSIONS IN MILLIMETERS.



GENERAL TOLERANCES:

Unless Otherwise Stated:
0 Dec. place $\pm 0.5\text{mm}$
1 Dec. place $\pm 0.25\text{mm}$
2 Dec. place $\pm 0.10\text{mm}$
Holes: $+0.25\text{mm}$ -0mm
Angles: $\pm 0.25^\circ$

CONFIDENTIAL: This drawing and its designs, specifications and engineering information disclosed hereon are the property of LIETZKE AUSTRALIA PTY. LTD. and are not to be disseminated or reproduced without the express written consent of LIETZKE AUSTRALIA PTY. LTD. This drawing is loaned in confidence and then only for the consideration of the matter disclosed hereon. In accepting the loan of this drawing, the recipient agrees to keep it and the matter disclosed hereon in confidence and not to use nor permit their use in any way detrimental to LIETZKE AUSTRALIA PTY. LTD.