


Rebate Edge Door Series

Metal Clad Rigid Foam Core

Technical Datasheet

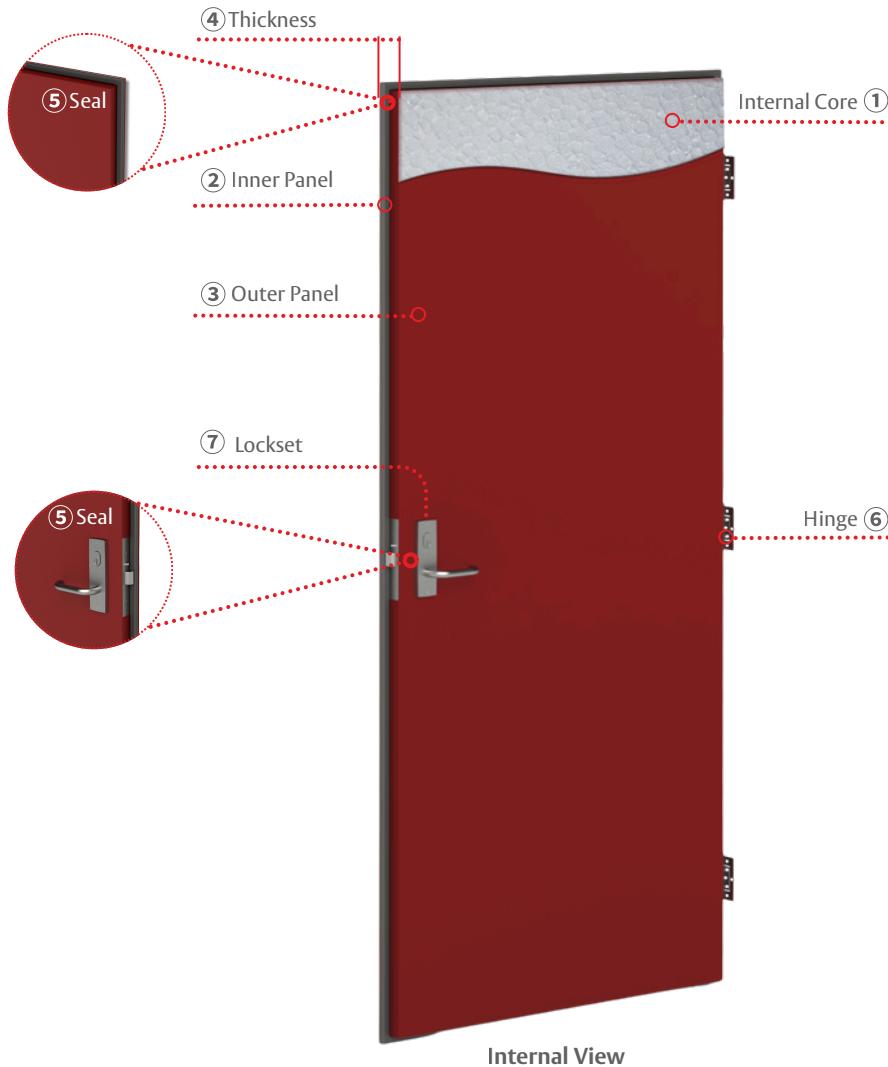

The **Rebate Edge metal clad rigid foam core door** with **full PVC seal** offers reversible handing, operates inward or outward, and is available in a full range of sizes in single or double-leaf configurations.

It can be **pre-hung** and installed in a 1.6 mm pressed metal frame with a 3-sided or 4-sided design.

The door is compatible with most locking devices and hardware. Optional accessories include vision panels, air relief grilles, and door seals.

Designed for **standard security applications**, it delivers clean, weather-resistant, and noise-suppressing performance - suitable for harsh and exposed environments.

Door Leaf Details:

① Internal Core:

Rigid Polystyrene - Standard
Polyisocyanurate (PIR) - Optional

② Inner Panel: Colorbond Sheet

③ Outer Panel: Colorbond Sheet
Dual colour option available;
Also available in Stainless Steel

④ Door Thickness: 40mm

⑤ Seal: PVC Seal to all edges

Hardware Details:

⑥ Hinge: Heavy Duty steel Hipline Hinge complete with nylon bushes

Number of Hinges varies depending on door weight or size

⑦ Lockset

Most locking devices and hardware can be factory fitted

Components Connection:

This door has a full interlocked rebate edge with an integral PVC seal for dust and weather protection and improved noise suppression.


Finish Options:

- Supplied in standard **Colorbond** colour with factory-applied durable polyester **Powdercoat**, optional colours available.
- Also offered in 304 or 316 Grade **Stainless Steel**.
- Other options available upon request.

Lietzke Australia PTY. LTD.

Adelaide Branch: 25 Circuit Court, Hendon SA 5014
Brisbane Branch: 181-185 Cobalt St, Carole Park, QLD 4300
Email: sasales@lietzkesecurity.com.au
qldsales@lietzkesecurity.com.au
Phone: (08) 8445 9999 Fax: (08) 8347 2073

DO NOT SCALE DRAWING.
DIMENSIONS IN MILLIMETERS.



GENERAL TOLERANCES:

Unless Otherwise Stated:
0 Dec. place ± 0.5 mm
1 Dec. place ± 0.25 mm
2 Dec. place ± 0.10 mm
Holes: $+0.25$ mm - 0mm
Angles: $\pm 0.25^\circ$


Scan for more information



Rebate Edge Door Series

Metal Clad Solid Core

Technical Datasheet

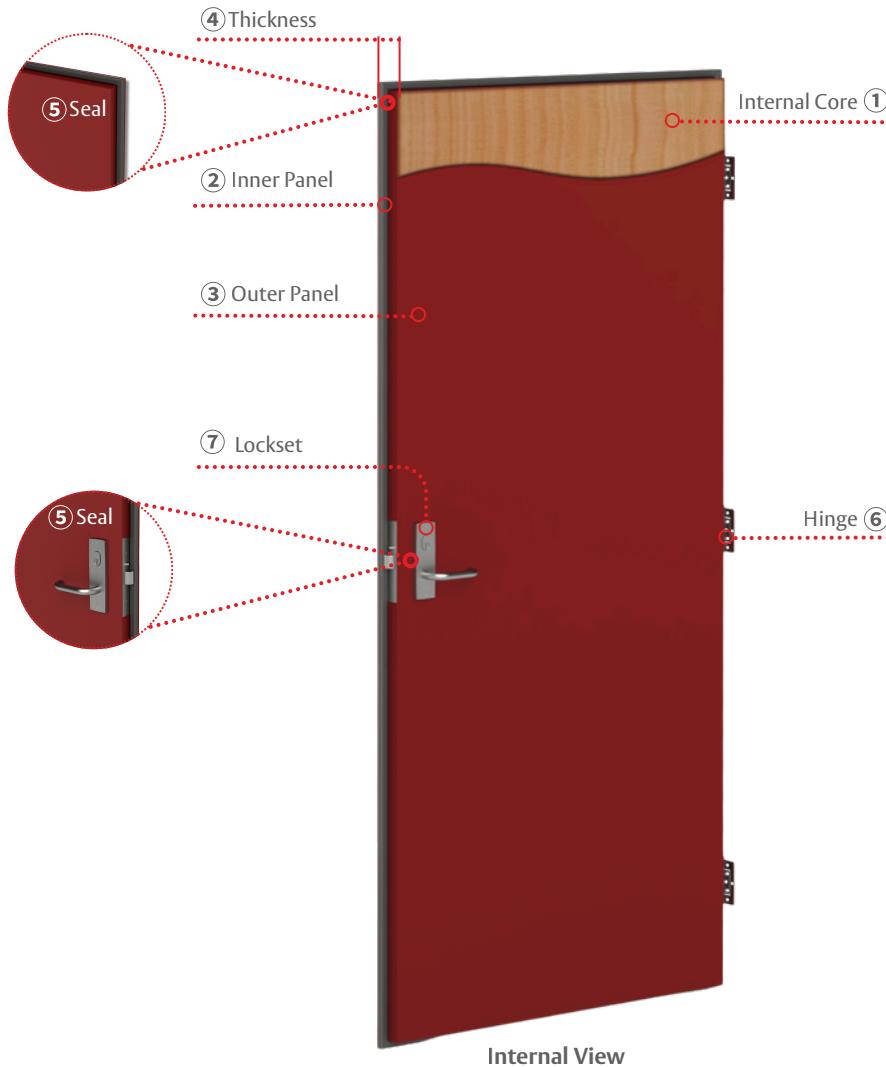

The **Rebate Edge metal clad solid core door** with **full PVC seal** offers reversible handing, operates inward or outward, and is available in a full range of sizes in single or double-leaf configurations.

It can be **pre-hung** and installed in a 1.6 mm pressed metal frame with a 3-sided or 4-sided design.

The door is compatible with most locking devices and hardware. Optional accessories include vision panels, air relief grilles, and door seals.

Designed for **medium security applications**, it delivers clean, weather-resistant, and noise-suppressing performance - suitable for harsh and exposed environments.

Door Leaf Details:

- ① Internal Core:
Blockboard - Standard
Particleboard MDF - Optional
Marine Grade Plywood - Optional
- ② Inner Panel: Colorbond Sheet
- ③ Outer Panel: Colorbond Sheet
Dual colour option available;
Also available in Stainless Steel
- ④ Door Thickness: 40mm
- ⑤ Seal: PVC Seal to all edges

Hardware Details:

- ⑥ Hinge: Heavy Duty steel Hipline
Hinge complete with nylon bushes
Number of Hinges varies depending
on door weight or size
- ⑦ Lockset
Most locking devices and hardware can
be factory fitted

Components Connection:

This door has a full interlocked rebate edge with an integral PVC seal for dust and weather protection and improved noise suppression.


Finish Options:

- Supplied in standard **Colorbond** colour with factory-applied durable polyester **Powdercoat**, optional colours available.
- Also offered in 304 or 316 Grade **Stainless Steel**.
- Other options available upon request.

Lietzke Australia PTY. LTD.

Adelaide Branch: 25 Circuit Court, Hendon SA 5014
Brisbane Branch: 181-185 Cobalt St, Carole Park, QLD 4300
Email: sasales@lietzkesecurity.com.au
qldsales@lietzkesecurity.com.au
Phone: (08) 8445 9999 Fax: (08) 8347 2073

DO NOT SCALE DRAWING.
DIMENSIONS IN MILLIMETERS.



GENERAL TOLERANCES:

Unless Otherwise Stated:
0 Dec. place ± 0.5 mm
1 Dec. place ± 0.25 mm
2 Dec. place ± 0.10 mm
Holes: $+0.25$ mm - 0mm
Angles: ± 0.25 °


Scan for more information



Rebate Edge Door Series

Modular Door

Technical Datasheet

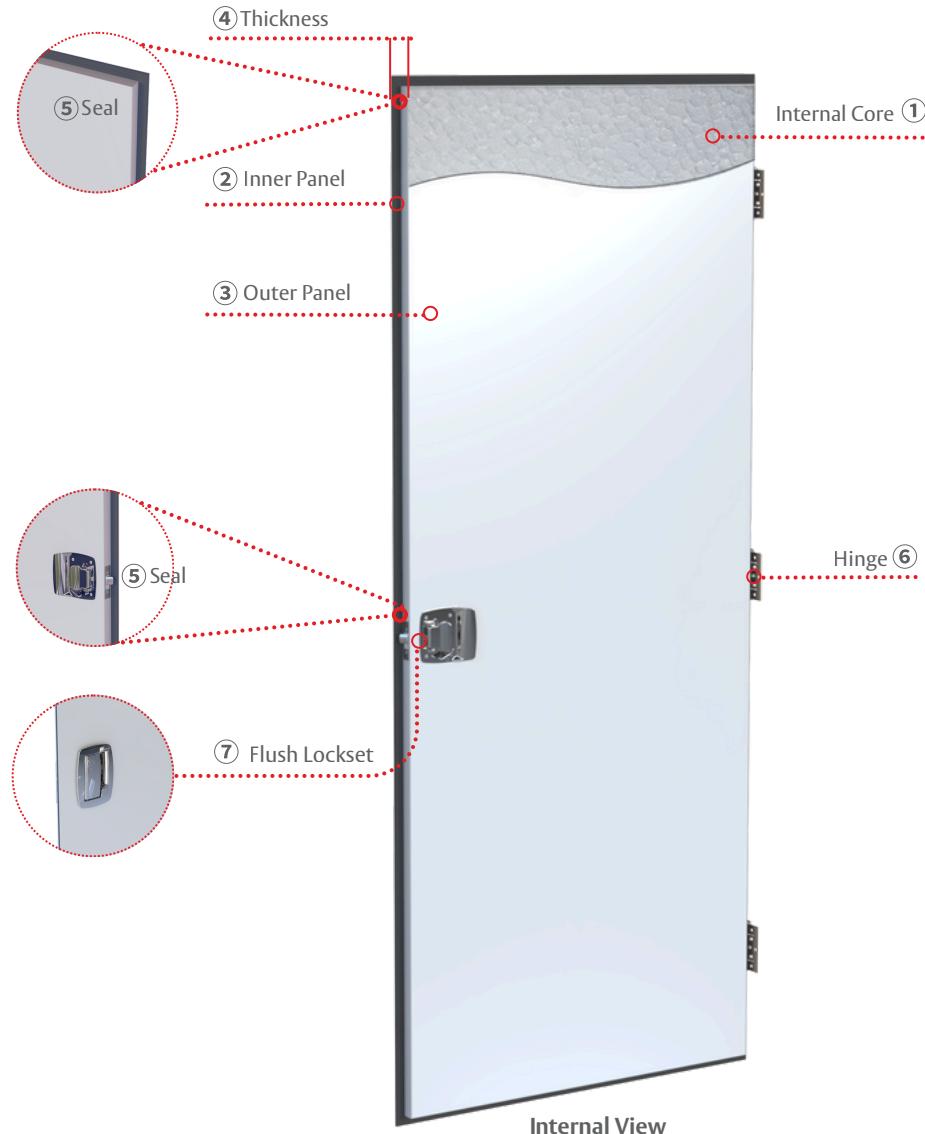

The **Rebate Edge Modular Door** with **full PVC seal** offers reversible handing, operates inward or outward, and is available in a full range of sizes in single-leaf configurations.

It can be **pre-hung** and installed in a 1.6 mm pressed metal frame with a 3-sided or 4-sided design.

The door is supplied with a quality **flush lockset**.

Optional accessories include vision panels, air relief grilles, and door seals.

Designed and engineered to withstand the demanding conditions of **transportable and modular buildings**, it delivers clean, weather-resistant, and noise-suppressing performance.

Door Leaf Details:

① Internal Core:

Rigid Foam Core Options: Solid Core Options:
Rigid Polystyrene Blockboard
Polyisocyanurate (PIR) Particleboard MDF
Marine Grade Plywood

② Inner Panel: Colorbond Sheet

③ Outer Panel: Colorbond Sheet

Dual colour option available;
Also available in Stainless Steel

④ Door Thickness: 40mm

⑤ Seal: PVC Seal to all edges

Hardware Details:

⑥ Hinge: Heavy Duty steel Hipline
Hinge complete with nylon bushes
Number of Hinges varies depending
on door weight or size

⑦ Flush Lockset

Specified flush lock for smooth, intuitive
operation, while maintaining a clean
and durable finish

Components Connection:

This door has a full interlocked rebate
edge with an integral PVC seal for dust
and weather protection and improved
noise suppression.


Finish Options:

- Supplied in standard **Colorbond**
colour with factory-applied durable
polyester **Powdercoat**, optional
colours available.
- Also offered in 304 or 316 Grade
Stainless Steel.
- Other options available upon request.

Lietzke Australia PTY. LTD.

Adelaide Branch: 25 Circuit Court, Hendon SA 5014
Brisbane Branch: 181-185 Cobalt St, Carole Park, QLD 4300
Email: sasales@lietzkesecurity.com.au
qldsales@lietzkesecurity.com.au
Phone: (08) 8445 9999 Fax: (08) 8347 2073

DO NOT SCALE DRAWING.
DIMENSIONS IN MILLIMETERS.



GENERAL TOLERANCES:

Unless Otherwise Stated:
0 Dec. place ± 0.5 mm
1 Dec. place ± 0.25 mm
2 Dec. place ± 0.10 mm
Holes: $+0.25$ mm -0mm
Angles: ± 0.25 °

Scan for more information

